



AF26-30-00-.. / AF26Z-30-00-.. 3-pole Contactors AC / DC Operated - with Screw Terminals

AF26(Z) contactors are used for controlling power circuits up to 690 V AC and 220 V DC. They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads.



- AF..(Z) contactors include an electronic coil interface providing reduced pull-in and holding consumption, particularly for AC control circuits
- Only four coils are needed to cover control voltages between 24...500 V 50/60 Hz or 20...500 V DC.
- AF..(Z) offer extended operating limits and are suitable worldwide for different control voltages. e.g.: the coil 100...250 V 50/60 Hz - DC is suitable for Europe (230 V 50 Hz) and for North America (120 V 60 Hz and 208 V 60 Hz).
- AF..(Z) contactors can manage large control voltage variations
- AF.Z contactors equipped with a 24...60 V 50/60 Hz - 20...60 V DC coil allow direct control by 24 V DC 500 mA PLC-output
- AF.Z contactors withstand short voltage dips and voltage sags (SEMI F47-0706 compliance)
- AF..(Z) contactors have built-in surge protection and do not require additional surge suppressors.



		11 kW	
		15 hp	

3D CAD outline drawings available on «Control Product 3D» portal

Ordering Details

IEC	UL/CSA	Control voltage		Main contacts	Auxiliary contacts fitted	Type	Order code	EAN	Weight
Rated power	3-phase motor rating	Uc min. ... Uc max.							Pack ^(ing)
400 V	480 V	V 50/60 Hz	V DC						1 piece
AC-3	hp								kg
kW									

3-pole Contactors

11	15	24...60	20...60	3	0	0	0	AF26-30-00-11	1SBL 237 001 R1100	3471523110915	0.310
		48...130	48...130	3	0	0	0	AF26-30-00-12	1SBL 237 001 R1200	3471523110922	0.310
		100...250	100...250	3	0	0	0	AF26-30-00-13	1SBL 237 001 R1300	3471523110939	0.310
		250...500	250...500	3	0	0	0	AF26-30-00-14	1SBL 237 001 R1400	3471523110946	0.350





Note: AF26-30-00-11 not suitable for a direct control by PLC-output. AF26-30-00-11 available in some countries: please consult your ABB representative.

3-pole Contactors - Low Consumption



11	15	-	12...20	3	0	0	0	AF26Z-30-00-20	1SBL 236 001 R2000	3471523114104	0.350
		24...60	20...60	3	0	0	0	AF26Z-30-00-21	1SBL 236 001 R2100	3471523114111	0.350
		48...130	48...130	3	0	0	0	AF26Z-30-00-22	1SBL 236 001 R2200	3471523114128	0.350
		100...250	100...250	3	0	0	0	AF26Z-30-00-23	1SBL 236 001 R2300	3471523114135	0.350

Note: Only AF.Z contactors with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole

Certifications and Approvals

											
---	---	---	---	---	--	--	--	--	--	--	--


Main Pole - Utilization Characteristics according to IEC

Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1	
Rated operational voltage U_e max.	690 V	
Rated frequency limits	25 ... 400 Hz	
Conventional free-air thermal current I_{th} acc. to IEC 60947-4-1, open contactors, $\theta \leq 40^\circ\text{C}$	50 A	
with conductor cross-sectional area	10 mm ²	
AC-1 Utilization category for air temperature close to contactor		
I_e / AC-1 rated operational current	$\theta \leq 40^\circ\text{C}$	45 A
U_e max. $\leq 690\text{ V}$, 50/60 Hz	$\theta \leq 60^\circ\text{C}$	40 A
	$\theta \leq 70^\circ\text{C}$	32 A
with conductor cross-sectional area	10 mm ²	
AC-3 Utilization category for air temperature close to contactor $\theta \leq 60^\circ\text{C}$ (for 1500 r.p.m., 50 Hz or 1800 r.p.m., 60 Hz, 3-phase motors)		
I_e / AC-3 max. rated operational current	220-230-240 V	26 A
 3-phase motors	380-400 V	26 A
	415 V	26 A
	440 V	26 A
	500 V	23 A
	690 V	17 A
	AC-3 rated operational power	220-230-240 V
 1500 r.p.m. 50 Hz 1800 r.p.m. 60 Hz 3-phase motors	380-400 V	11 kW
	415 V	11 kW
	440 V	15 kW
	500 V	15 kW
	690 V	15 kW
	Rated making capacity AC-3	10 x I_e AC-3 acc. to IEC 60947-4-1
Rated breaking capacity AC-3	8 x I_e AC-3 acc. to IEC 60947-4-1	
AC-8a Utilization category (without thermal overload relay - $U_e 400\text{ V}$ - $\theta \leq 40^\circ\text{C}$)		
I_e / AC-8a rated operational current	30 A	
AC-8a rated operational power	15 kW	
Short-circuit protection for contactors without thermal O/L relay - Motor protection excluded $U_e \leq 500\text{ V AC}$ - gG type fuse	50 A	
Rated short-time withstand current I_{cw} at 40°C ambient temperature, in free air from a cold state	1 s	700 A
	10 s	350 A
	30 s	225 A
	1 min	150 A
	15 min	50 A
Maximum breaking capacity $\cos \phi = 0.45$	at 440 V	500 A
	at 690 V	200 A
Heat dissipation per pole	I_e / AC-1	1.8 W
	I_e / AC-3	0.6 W
Max. electrical switching frequency	AC-1	600 cycles/h
	AC-3	1200 cycles/h
	AC-2, AC-4	150 cycles/h

Main Pole - Utilization Characteristics according to UL / NEMA / CSA

Standards	UL 508, CSA C22.2 N°14	
Rated operational voltage Ue max.	600 V	
NEMA size	1	
NEMA continuous amp rating	thermal current	27 A
NEMA maximum H.P. ratings 1-phase, 60 Hz	115 V AC	2 hp
	230 V AC	3 hp
NEMA maximum H.P. ratings 3-phase, 60 Hz	200 V AC	7-1/2 hp
	230 V AC	7-1/2 hp
	460 V AC	10 hp
	575 V AC	10 hp
UL General use rating		
600 V AC	45 A	
With conductor cross-sectional area	AWG 8	
80 V DC - 1-pole	45 A	
With conductor cross-sectional area	AWG 8	
UL maximum 1-phase motor rating		
Amp-rating	120 V AC	24 A
	240 V AC	17 A
Motor power	120 V AC	2 hp
	240 V AC	3 hp
UL maximum 3-phase motor rating		
Amp-rating	200-208 V AC	25.3 A
	220-240 V AC	22 A
	440-480 V AC	21 A
	550-600 V AC	22 A
Motor power (for 1500 r.p.m., 50 Hz or 1800 r.p.m., 60 Hz 3-phase motors)	200-208 V AC	7.5 hp
	220-240 V AC	7.5 hp
	440-480 V AC	15 hp
	550-600 V AC	20 hp
Short-circuit protection		
for contactors without thermal O/L relay - Motor protection excluded		
Fuse rating	150 A	
Fuse type, 600 V	NTD	
Max. electrical switching frequency		
for general use	600 cycles/h	
for motor use	1200 cycles/h	

General Technical Data

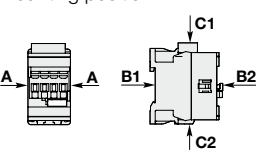
Rated insulation voltage U_i		
acc. to IEC 60947-4-1		690 V
acc. to UL /CSA		600 V
Rated impulse withstand voltage U_{imp}		6 kV
Electromagnetic compatibility		Devices complying with IEC 60947-1 / EN 60947-1 - Environment A
Ambient air temperature close to contactor		
Operation	fitted with thermal overload relay	-25 ... +60 °C
	without thermal overload relay	-40 ... +70 °C
Storage		-60 ... +80 °C
Climatic withstand		Category B according to IEC 60947-1 Annex Q
Operating altitude		≤ 3000 m
Mechanical durability		
Number of operating cycles		10 millions operating cycles
Max. switching frequency		3600 cycles/h
Shock withstand		
acc. IEC 60068-2-27 and EN 60068-2-27		
Mounting position 1		
		Shock direction 1/2 sinusoidal shock for 11 ms: no change in contact position A 30 g B1 25 g Closed position / 5 g Open position B2 15 g C1 25 g C2 25 g
Vibration withstand		5 ... 300 Hz
acc. to IEC 60068-2-6		4 g Closed position / 2 g Open position

Magnet System Characteristics

Coil operating limits		AC supply	at $\theta \leq 60$ °C 0.85 x U_c min ... 1.1 x U_c max at $\theta \leq 70$ °C 0.85 x U_c min ... U_c max
acc. to IEC 60947-4-1		DC supply	at $\theta \leq 60$ °C 0.85 x U_c min ... 1.1 x U_c max at $\theta \leq 70$ °C (AF) 0.85 x U_c min ... U_c max - (AF.Z) 0.85 x U_c min ... 1.1 x U_c max
AC control voltage 50/60 Hz	Rated control circuit voltage U_c		24 ... 500 V AC
	Coil consumption	Average pull-in value	(AF) 50 VA - (AF.Z) 16 VA
		Average holding value	(AF) 2.2 VA / 2 W - (AF.Z) 1.7 VA / 1.5 W
DC control voltage	Rated control circuit voltage U_c		12 ... 500 V DC
	Coil consumption	Average pull-in value	(AF) 50 W - (AF.Z) 12 ... 16 W
		Average holding value	(AF) 2 W - (AF.Z) 1.7 W
PLC-Output control			(AF.Z) ≥ 500 mA 24 V DC
Drop-out voltage in % of U_c min.			≤ 60 % U_c min
Voltage sag immunity according to SEMI F47-0706			(AF.Z) conditions of use on request
Dips withstand (level 0% according to IEC 61000-4-11) -20 °C ≤ θ ≤ +60 °C			(AF.Z) 22 ms average for $U_c = 24$... 250 V 50/60Hz
Operating time			
between coil energization and:	N.O. contact closing		40 ... 95 ms
	N.C. contact opening		38 ... 90 ms
between coil de-energization and:	N.O. contact opening		11 ... 95 ms
	N.C. contact closing		13 ... 98 ms

Mounting Characteristics

Mounting positions

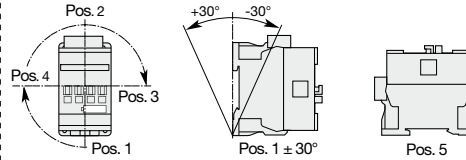

Max. N.C. built-in and add-on N.C. auxiliary contacts: see accessory fitting details for a 3-pole contactor AF09 ... AF38

Mounting distances

The contactors can be assembled side by side.

Fixing

on rail according to IEC 60715, EN 60715
by screws (not supplied)

35 x 7.5 mm or 35 x 15 mm
2 x M4 screws placed diagonally

Connecting Characteristics

Main terminals



Screw terminals with cable clamp

Connecting capacity (min. ... max.)

Main conductors (poles)

	Rigid	solid ($\leq 4 \text{ mm}^2$)	1 x	2.5 ... 10 mm ²
		stranded ($\geq 6 \text{ mm}^2$)	2 x	2.5 ... 10 mm ²
	Flexible with non insulated ferrule		1 x	1.5 ... 10 mm ²
			2 x	1.5 ... 10 mm ²
	Flexible with insulated ferrule		1 x	1.5 ... 10 mm ²
			2 x	1.5 ... 4 mm ²
	Bars or lugs		L <	12.5 mm

Capacity according to UL/CSA 1 or 2 x AWG 14 ... 8

Stripping length 14 mm

Auxiliary conductors

(built-in auxiliary terminals + coil terminals)

	Rigid solid		1 x	1 ... 2.5 mm ²
			2 x	1 ... 2.5 mm ²
	Flexible with non insulated ferrule		1 x	0.75 ... 2.5 mm ²
			2 x	0.75 ... 2.5 mm ²
	Flexible with insulated ferrule		1 x	0.75 ... 2.5 mm ²
			2 x	0.75 ... 1.5 mm ²
	Bars or lugs		L <	8 mm

Capacity according to UL/CSA 1 or 2 x AWG 18 ... 14

Stripping length 10 mm

Degree of protection

acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529

Main terminals IP20

Coil terminals IP20

Built-in auxiliary terminals

Screw terminals

(delivered in open position, screws of unused terminals must be tightened)

Main terminals M4

Coil terminals M3.5

Built-in auxiliary terminals

Screwdriver type

Flat $\varnothing 5.5$ / Pozidriv 2

Tightening torque


Main pole terminals 2.5 Nm / 22 lb.in

Coil terminals 1.2 Nm / 11 lb.in

Built-in auxiliary terminals

Main Accessories

Ordering Details



Description	Auxiliary contacts 	Type	Order code	EAN	Pack ^(ing) piece	Weight	
						kg (1 pce)	
Additional auxiliary contact blocks	Front-mounted instantaneous auxiliary contact blocks	0 1 - -	CA4-01	1SBN 010 110 R1001	3471523130029	1	0.014
		1 0 - -	CA4-10	1SBN 010 110 R1010	3471523130005	1	0.014
		0 1 - -	CA4-01-T	1SBN 010 110 T1001	3471523130395	10	0.014
		1 0 - -	CA4-10-T	1SBN 010 110 T1010	3471523130371	10	0.014
	Front-mounted auxiliary contact blocks with N.O. leading contact and N.C. lagging contact	- - 0 1	CC4-01	1SBN 010 111 R1001	3471523130432	1	0.014
		- - 1 0	CC4-10	1SBN 010 111 R1010	3471523130425	1	0.014
	Side-mounted instantaneous auxiliary contact blocks	1 1 - -	CAL4-11	1SBN 010 120 R1011	3471523130043	1	0.040
		1 1 - -	CAL4-11-T	1SBN 010 120 T1011	3471523130418	10	0.040
	Front-mounted instantaneous auxiliary contact blocks	0 4 - -	CA4-04E	1SBN 010 140 R1004	3471523130159	1	0.055
		2 2 - -	CA4-22E	1SBN 010 140 R1022	3471523130128	1	0.055
		3 1 - -	CA4-31E	1SBN 010 140 R1031	3471523130135	1	0.055
		4 0 - -	CA4-40E	1SBN 010 140 R1040	3471523130142	1	0.055
	Front-mounted instantaneous auxiliary contact and A1/A2 coil terminal blocks	1 1 - -	CAT4-11E	1SBN 010 151 R1011	3471523130067	1	0.040
Interlocks	Mechanical interlock unit		VM4	1SBN 030 105 T1000	3471523130609	10	0.005
	Mechanical and electrical interlock set	1 1 - -	VEM4	1SBN 030 111 R1000	3471523130616	1	0.035
	Fixing clips		BB4	1SBN 110 120 W1000	3471523130722	50	0.002
Connection accessories for starting	Connecting links with manual motor starters		BEA26-4	1SBN 082 306 T1000	3471523130746	10	0.025
			BEA38-4	1SBN 082 306 T2000	3471523130753	10	0.030
	Connection sets for reversing contactors		BER38-4	1SBN 082 311 R1000	3471523130784	1	0.100
Additional coil terminal block	Additional coil terminal block		LDC4	1SBN 070 156 T1000	3471523130678	10	0.010
Protective covers	Protective covers		BX4	1SBN 110 108 T1000	3471523130708	10	0.006
			BX4-CA	1SBN 110 109 W1000	3471523130715	50	0.001
Function markers	Function markers		BA4	1SNA 235 156 R2700	3472592351568	16	0.011
			HTP500-BA4	1SNA 235 712 R2400	3472592357126	1	0.220
			SPRC 1	1SNA 360 010 R1500	3472593600108	1	0.290

Note:

- CAT4: not fittable on AF..Z contactors with DC control voltage 12...20VDC.
- VM4: includes 2 fixing clips (BB4) to maintain together both contactors.
- VEM4: includes a VM4 mechanical interlock unit with 2 fixing clips (BB4), a VE4 electrical interlock block and A2-A2 connection. VE4 block must be used with its A2-A2 connection to respect the electrical connection diagram.
- VE4 block must be used with its A2-A2 connection to respect the electrical connection diagram.
- VEM4 not fittable on AF..Z contactors with DC control voltage 12...20 V DC.

Terminal Marking and Positioning


Standard devices without addition of auxiliary contacts




AF26-30-00.. / AF26Z-30-00..

AF26-30-00.. / AF26Z-30-00..


Dimensions mm, inches

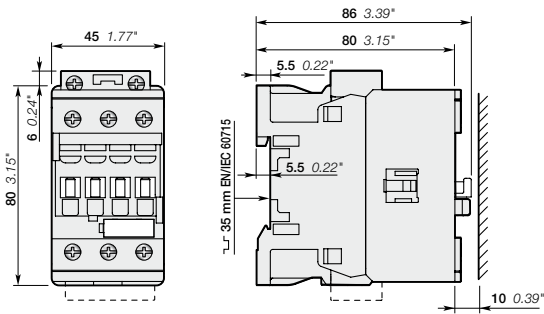


AF26

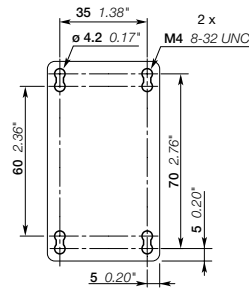


AF26

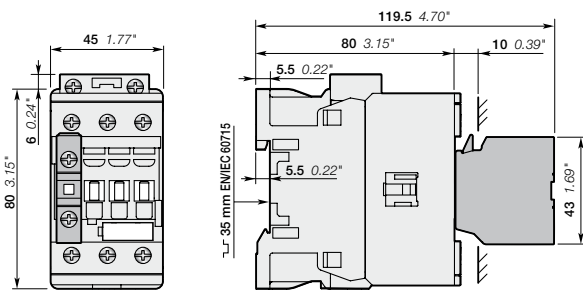


**AF26
+ CA4, CC4 1-pole auxiliary contact block**

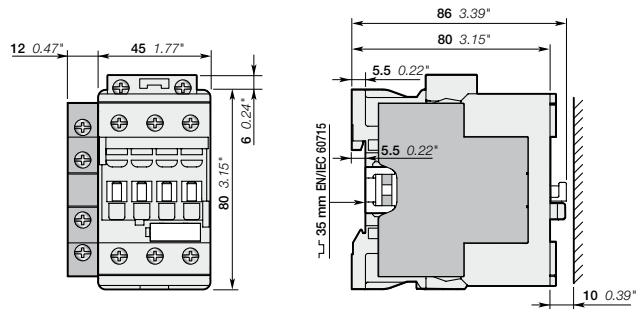


**AF26
+ CAL4-11 2-pole auxiliary contact block**

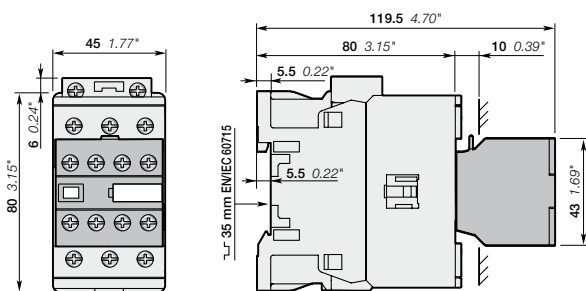


**AF26
+ CA4 4-pole auxiliary contact block**

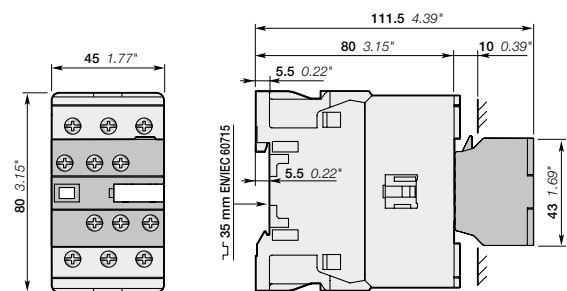

**AF26
+ CAT4 2-pole auxiliary contact and coil terminal block**

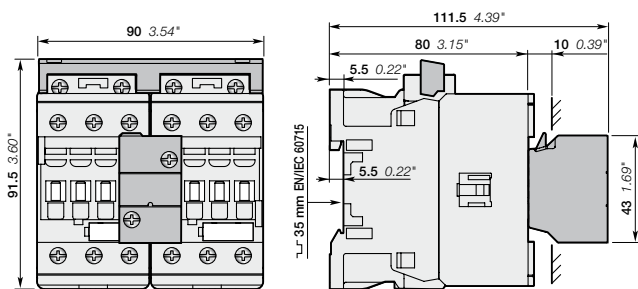

**AF26
+ VEM4 mechanical and electrical interlock set**

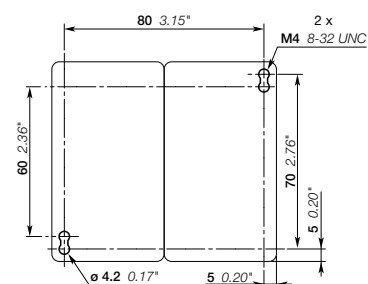

**AF26
+ VEM4 mechanical and electrical interlock set**

Note: contactor lateral distance to grounded component 2 mm 0.08" min.

Contact us

ABB France

Low Voltage Products Division

10, rue Ampère Z.I. - B.P. 114
F-69685 Chassieu cedex / France

You can find the address of your local sales organisation
on the ABB home page
<http://www.abb.com/contacts> -> Low Voltage products

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2011 ABB
All rights reserved