


# FICHA DEL PRODUCTO

ITEM:


CÓDIGO:

IMAGEN:

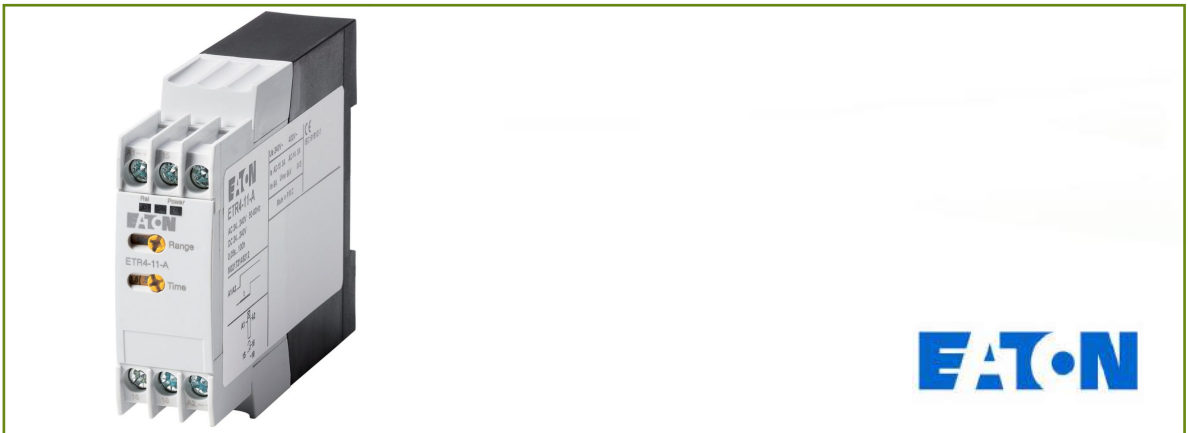


DESCRIPCIÓN  
APLICACIÓN:

DATOS TÉCNICOS	0504031891EI
Modelo	31891
Multifunción	18 funciones
Tensión de alimentación	24-240VAC/DC
Frecuencia nominal	50/60Hz
Terminal de suministro	A1, A2
Terminal de pulso	B1
Intervalo de tiempo	0.05s-100h
Contactos de salida	1 C/O
Capacidad de contactos	AC-15: 3A
Tensión de aislamiento	440V
Grado de protección	IP20
Vida eléctrica	30,000,000
Vida mecánica	30,000,000
Altitud	≤2000m
Temperatura ambiente	-25°C +60°C

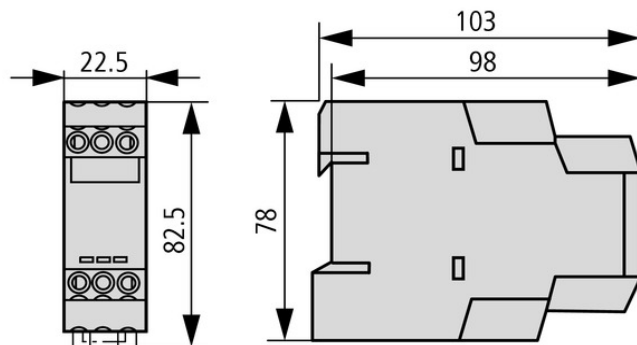

# FICHA DEL PRODUCTO

DESCRIPCIÓN  
APLICACIÓN:

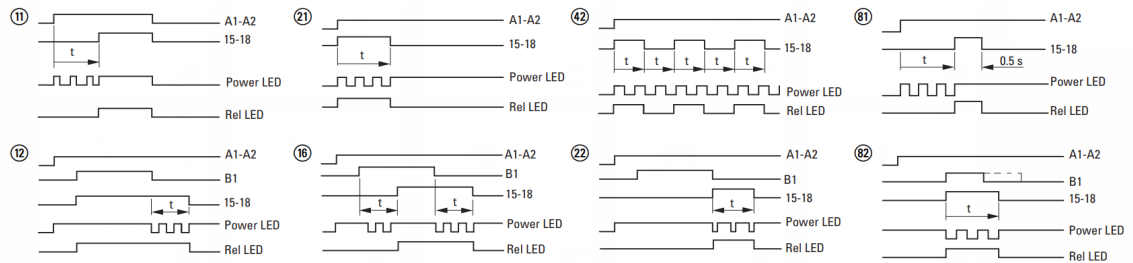

- ⑪ on-delayed
- ⑫ off-delayed
- ⑳ with fleeting make contact
- ⑯ on- and off-delayed
- ㉔ flashing
- ㉒ with fleeting break contact
- ㉑ pulse generating
- ㉓ pulse shaping

FUNCIONES	Flashing, pulse initiating
	On- and Off-delayed
	Pulse generating
	Adjustable timing function
	Outputs, reversible delayed/undelayed
	Off-delayed
	Pulse forming
	Delay on de-energization
	Multi-functional
	Fleeting contact on energization
	Clock function, starting with pause, variable
	Clock function, starting with pulse, variable
	On-delayed
	Delay-on energization
	Flashing, starting with pulse, fixed time
	Fleeting contact on de-energization
	Flashing, starting with pause, fixed time
	Pulse shaping

2012 - 2013