

FICHA DEL PRODUCTO

ITEM:

Modulo de comunicación Fieldbus BACnet/IP para ACH580

CÓDIGO:

13040556AB

IMAGEN:



DESCRIPCIÓN
APLICACIÓN:

Start-up

When the module is connected to the drive, the drive control program sets the applicable parameters. See the appropriate drive manual.


Basic parameter settings

Index	Name	Value
20.01	Ext1 commands	Fieldbus A
22.11	Speed ref1 source	FBA A ref 1
28.11	Frequency ref1 source	FBA A ref 1
50.01	FBA A enable	Enable (or select the option slot in which the module is installed). This activates the communication module. The HOST LED becomes green.
50.02	FBA A comm loss func	Fault
51.04	IP configuration	Set the IP address according your network configuration.
51.05...08	IP address	
51.09	Subnet CIDR	
51.14	Device obj ID lo	Set a unique device object instance value for BACnet devices.
51.15	Device obj ID hi	

To take the settings into use, validate and refresh the parameters with parameter *51.27 FBA par refresh*.

Electrical installation

Layout of the module

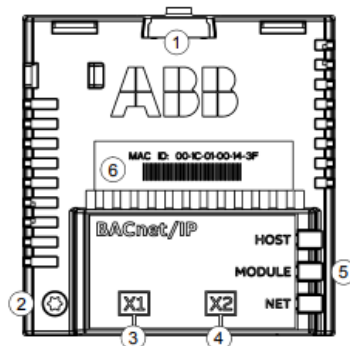

No.	Description
1	Lock
2	Mounting and grounding screw
3	RJ-45 connector [X1] to Ethernet
4	RJ-45 connector [X2] for chaining another module
5	Diagnostic LEDs
6	MAC ID