



## FIRERATED ALUMINIUM ENCLOSED SAFETY SWITCHES / ISOLATORS 16-160A

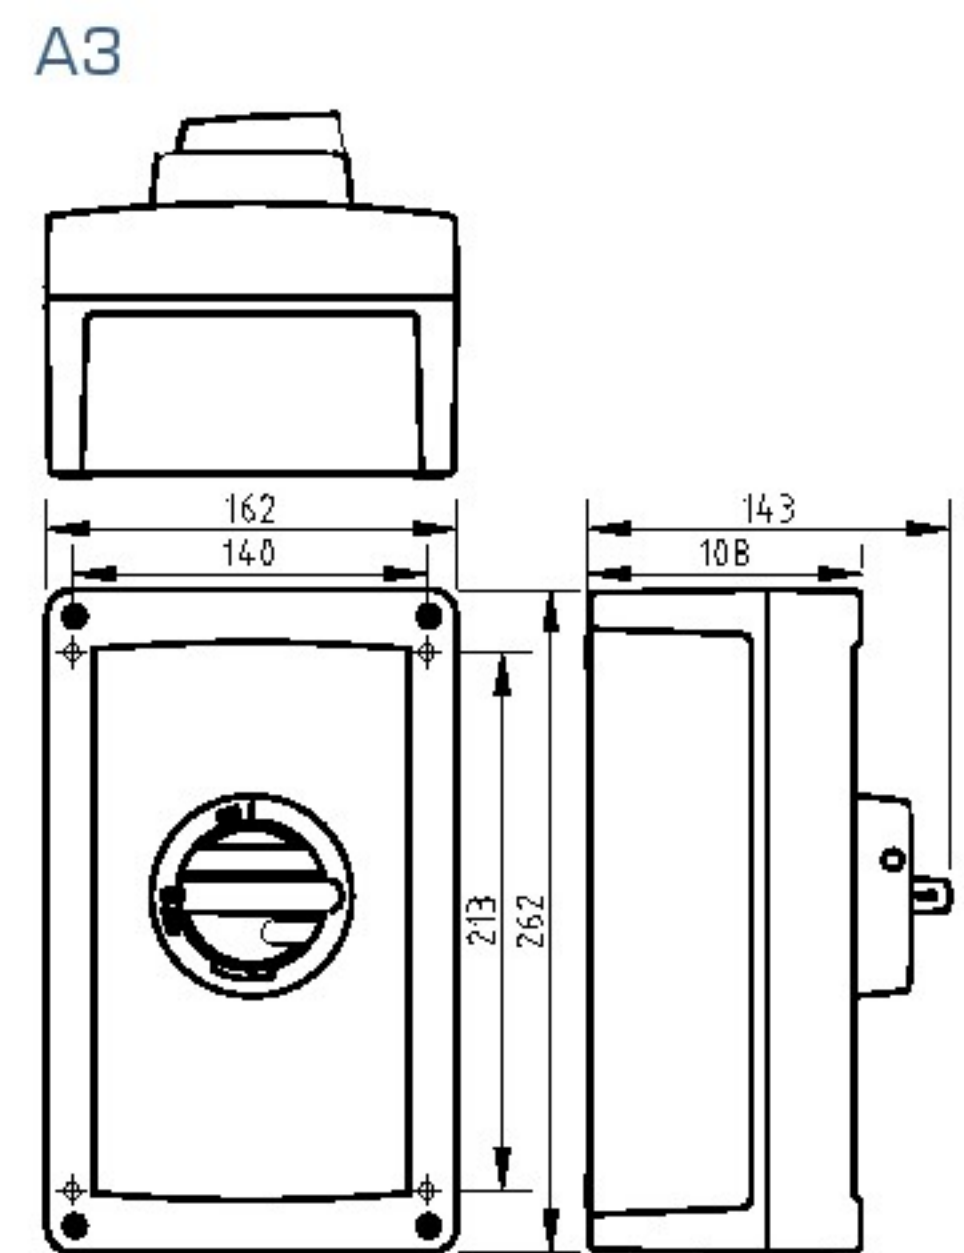

- F200 3H
- IP66 Enclosure type A2, A3
- Padlockable
- Door interlock with defeat mechanism
- ON-locking facility as option
- Good corrosion and UV resistance
- Excellent for hard weather conditions

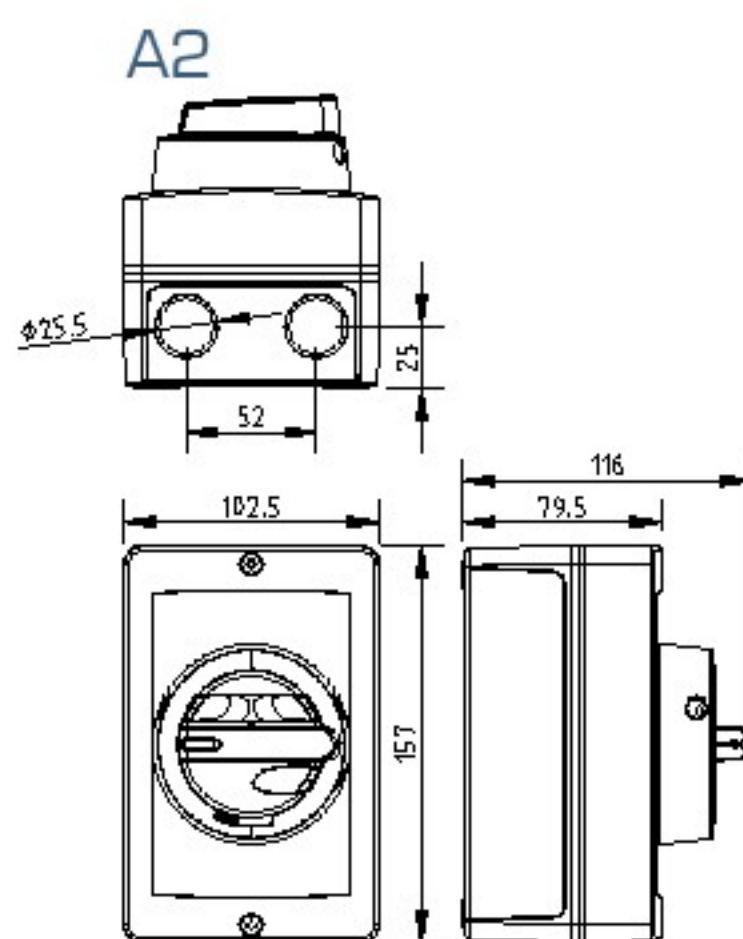

Type	AC-21		AC-22	AC-23		AC-23	690 V	EAN-Code 6419410...	Enclosure	Weight kg
	400 V	415 V		400 V	415 V					
	I <sub>n</sub> / A	I <sub>n</sub> / A	I <sub>n</sub> / A	I <sub>n</sub> / A	P / kW	I <sub>n</sub> / A	P / kW			
<b>FIRERATED</b>										
<b>3-pole</b>										
KEA 316U FR	25 A		16 A	16 A	7.5 kW	16 A	11 kW	...305294	A2	0.8
KEA 325U FR	40 A		25 A	25 A	11 kW	25 A	22 kW	...305300	A2	0.8
KEA 340U FR	63 A		40 A	40 A	22 kW	32 A	30 kW	...305317	A2	0.8
KEA 363U FR	80 A		63 A	40 A	22 kW	40 A	37 kW	...305324	A3	2
KEA 380U FR	100 A		80 A	63 A	30 kW	40 A	37 kW	...305331	A3	2
<b>4-pole</b>										
KEA 416U FR	25 A		16 A	16 A	7.5 kW	16 A	11 kW	...305348	A2	0.9
KEA 425U FR	40 A		25 A	25 A	11 kW	25 A	22 kW	...305355	A2	0.9
KEA 440U FR	63 A		40 A	40 A	22 kW	32 A	30 kW	...305362	A2	0.9
KEA 463U FR	80 A		63 A	40 A	22 kW	40 A	37 kW	...305379	A3	2.1
KEA 480U FR	100 A		80 A	63 A	30 kW	40 A	37 kW	...305386	A3	2.1
<b>6-pole</b>										
KEA 616U FR	25 A		16 A	16 A	7.5 kW	16 A	11 kW	...305393	A3	2.3
KEA 625U FR	40 A		25 A	25 A	11 kW	25 A	22 kW	...305409	A3	2.3
KEA 640U FR	63 A		40 A	40 A	22 kW	32 A	30 kW	...305416	A3	2.3
KEA 663U FR	80 A		63 A	40 A	22 kW	40 A	37 kW	...305423	A3	2.3
KEA 680U FR	100 A		80 A	63 A	30 kW	40 A	37 kW	...305430	A3	2.3
<b>8-pole</b>										
KEA 816U FR	25 A		16 A	16 A	7.5 kW	16 A	11 kW	...305447	A3	2.4
KEA 825U FR	40 A		25 A	25 A	11 kW	25 A	22 kW	...305454	A3	2.4
KEA 840U FR	63 A		40 A	40 A	22 kW	32 A	30 kW	...305461	A3	2.4
KEA 863U FR	80 A		63 A	40 A	22 kW	40 A	37 kW	...305478	A3	2.4
KEA 880U FR	100 A		80 A	63 A	30 kW	40 A	37 kW	...305485	A3	2.4

\* 400/415 V