

# FICHA DEL PRODUCTO

ITEM:

Transformador corriente 600/5A, Ø interno 41 mm, Clase 0,5

CÓDIGO:

2901060RS


IMAGEN:



**RISHABH**  
INSTRUMENTS  
Measure, Control & Record with a Difference

DESCRIPCIÓN  
APLICACIÓN:

Transformadores Segun IEC-61869-1&2 / IEC- 60044 -1, BS 3938, IS 2705 -1,2&3.  
Case de Policarbonato UL94V-0  
Voltaje maximo: 700V, 50/60Hz  
Temperatura de operacion: -25°C a 40°C

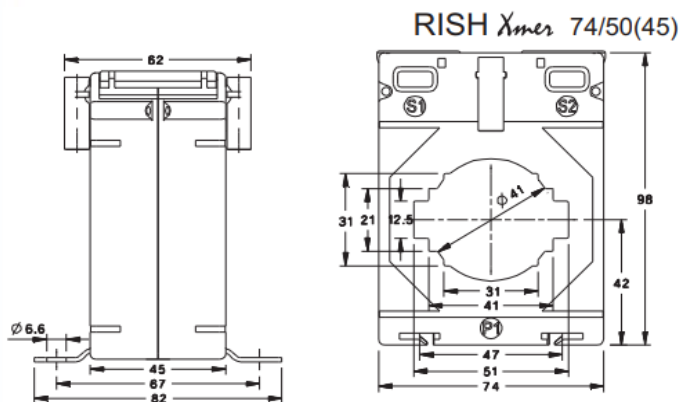

| Primary Current | RISH $\chi_{mer}$ 74/50(45) |       |        |        |
|-----------------|-----------------------------|-------|--------|--------|
|                 | Accuracy                    |       |        |        |
|                 | 0.2S/0.5S                   | 0.2   | 0.5    | 1.0    |
| 100A            | -                           | -     | -      | 1.5VA  |
| 120A            | -                           | -     | -      | 1.5VA  |
| 125A            | -                           | -     | -      | 1.5VA  |
| 150A            | -                           | -     | -      | 2.5VA  |
| 200A            | -                           | -     | 1.5VA  | 3.75VA |
| 250A            | 1.5VA                       | 1.5VA | 2.5VA  | 5VA    |
| 300A            | 1.5VA                       | 1.5VA | 5VA    | 7.5VA  |
| 400A            | 2.5VA                       | 2.5VA | 5VA    | 7.5VA  |
| 500A            | 5VA                         | 5VA   | 7.5VA  | 10VA   |
| 600A            | 5VA                         | 7.5VA | 10VA   | 12.5VA |
| 750A            | 5VA                         | 10VA  | 12.5VA | 15VA   |
| 800A            | 5VA                         | 10VA  | 12.5VA | 15VA   |
| 1000A           | 5VA                         | 10VA  | 12.5VA | 15VA   |