

FICHA DEL PRODUCTO

ITEM:

CÓDIGO:

IMAGEN:



DESCRIPCIÓN
APLICACIÓN:

Pletina de cobre estañada
tiras de 1 metro
Grosor: 5 y 10 mm
Anchos: 15, 20, 25, 30, 40, 50 mm
Perforaciones con hilo cada 25mm
Amperaje recomendado con elevacion de temperatura = 30°C

Cod. NDU

39031551AK

39032051AK

39032551AK


39033051AK

39034051AK

390330101AK

390340101AK

390350101AK

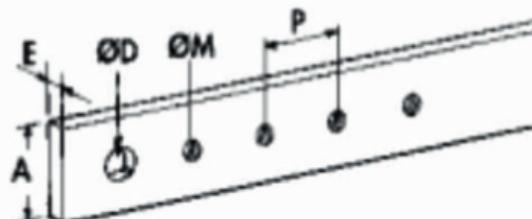

E (mm)	A (mm)	Hilo	P (mm)	In (A)
5	15	M6	25	160
5	20	M6	25	230
5	25	M6	25	280
5	30	M6	25	330
5	40	M6	25	400
10	30	M8	25	500
10	40	M8	25	600
10	50	M8	25	700