

# Switched Mode Power Supply

- Excellent Load & Line Regulation
- High Noise Immunity & Low Ripple
- No Load Power Consumption of less than 0.5W
- Overload & Short Circuit Protection
- High Efficiency of Operation
- Suitable for Temperatures upto 55°C
- Small Form Factor
- Peak Power Capacity



Cat. No.	24AS244D6D	24AS126D6D	
<b>Parameters</b>			
Supply Voltage (φ)	230 VAC		
Supply Variation	-30% to +15%		
Frequency	50 Hz		
Power Consumption @ No Load	0.5W Max. @ 230 VAC		
AC Current	0.8A / 230 VAC	0.62A / 230 VAC	
Efficiency	> 85%	> 80%	
Inrush Current	Cold Start 50A / 230 VAC		
Leakage Current	< 0.2μA / 230 VAC		
Output	Voltage	24 VDC	12 VDC
	Rated Current	4A	6A
	Current Range	0 - 4A	0 - 6A
	Rated Power	96W	72W
	Output Voltage Accuracy	± 1%	
	Line Regulation	1%	
	Load Regulation	1%	
	Ripple & Noise	150 mV (P-P)	100 mV (P-P)
	Over Voltage Protection	26V ~ 33 V	13V ~ 16 V
	Over Load Capacity	168% of rated output (Max. 10s)	130% of rated output (Max. 10s)
Continuous Open Circuit	Normal Operation		
Over Current Protection	Voltage Drop		
Continuous Short Circuit Protection	Auto Recovery after fault condition is removed		
Start Up Time	3s Max. (At minimum input voltage and rated load)		
Hold Up Time	30ms Min. (At minimum input voltage and rated load)		
Withstand Voltage	Input to Output 3 KV AC for 1 Minute, 5 mA		
LED Indications	Green LED: Output ON		
Operating Temperature	-10°C to + 55°C		
Storage Temperature	-25°C to + 85°C		
Enclosure	Flame Retardant UL94-V0		
Dimension (W x H x D) (in mm)	105 X 90 X 58		
Weight (unpacked)	350 g		
Mounting	Base / DIN Rail		
Certification	 		
<b>EMI / EMC</b>			
Harmonic Current Emissions	IEC 61000-3-2	Ed. 3.0 (2005-11) Class A	
ESD	IEC 61000-4-2	Ed. 1.2 (2001-04) Level II	
Radiated Susceptibility	IEC 61000-4-3	Ed. 3.0 (2006-02) Level III	
Electrical Fast Transients	IEC 61000-4-4	Ed. 2.0 (2004-07) Level IV	
Surges	IEC 61000-4-5	Ed. 2.0 (2005-11) Level IV	
Conducted Susceptibility	IEC 61000-4-6	Ed. 2.2 (2006-05) Level III	
Voltage Dips & Interruptions (AC)	IEC 61000-4-11	Ed. 2.0 (2004-03) All 7 Levels	
Conducted Emission	CISPR 14-1	Ed. 5.0 (2005-11) Class A	
Radiated Emission	CISPR 14-1	Ed. 5.0 (2005-11) Class A	


## ORDERING INFORMATION

Cat. No.	Description	Codigo NDU
24AS244D6D	230V AC, 24 VDC / 4A, Switched Mode Power Supply	610924040GI
24AS126D6D	230V AC, 12 VDC / 6A, Switched Mode Power Supply	610912060GI
24BS241D2F	110 - 240 VAC, 24 VDC / 1A, Switched Mode Power Supply	610924010GI
24BS24AD4E	110 - 240 VAC, 24 VDC / 2.5A, Switched Mode Power Supply	610924025GI
24BS24BD1F	110 - 240 VAC, 24 VDC / 0.5A, Switched Mode Power Supply	610924005GI
24BS051D1F	110 - 240 VAC, 5 VDC / 1.0A, Switched Mode Power Supply	610905010GI


# Switched Mode Power Supply




## MOUNTING DIMENSIONS (mm)

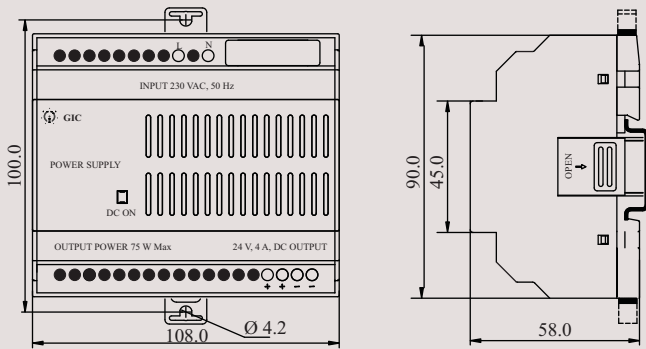


24AS244D6D, 24AS126D6D

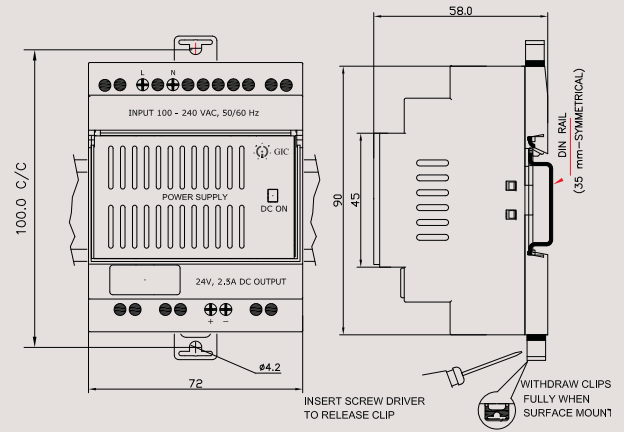

24BS24AD4E

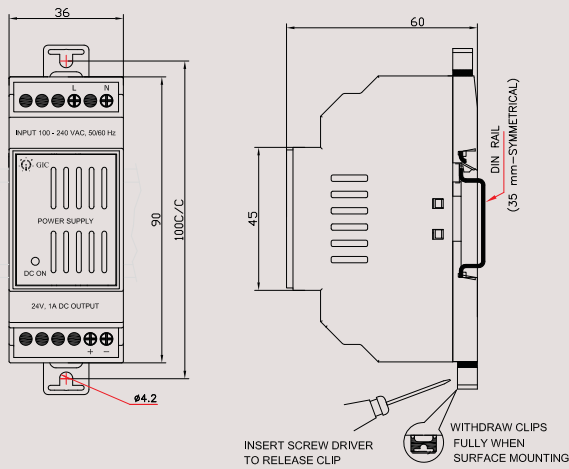



24BS241D2F

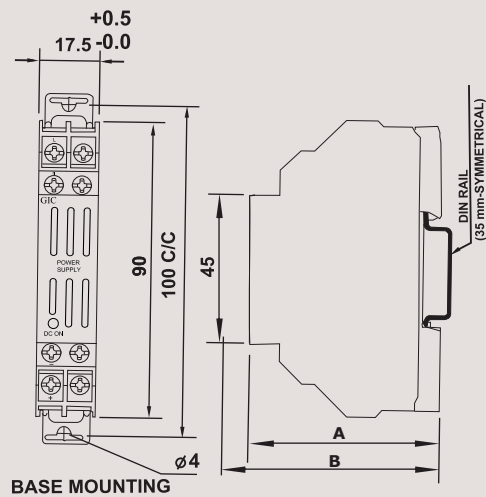

BASE MOUNTING

24BS24BD1F, 24BS051D1F

## TERMINAL TORQUE & CAPACITY

 Ø 3.5...5.0 mm	Torque - 1.1 N.m (10 Lb.in) Terminal screw - M3.5
	Solid Wire - 2 X 0.2...2.5 mm <sup>2</sup>
AWG	1 X 24 to 10